


Spring in Action


Ch 8
(Ch 13 in 2nd Ed.)

xml file?

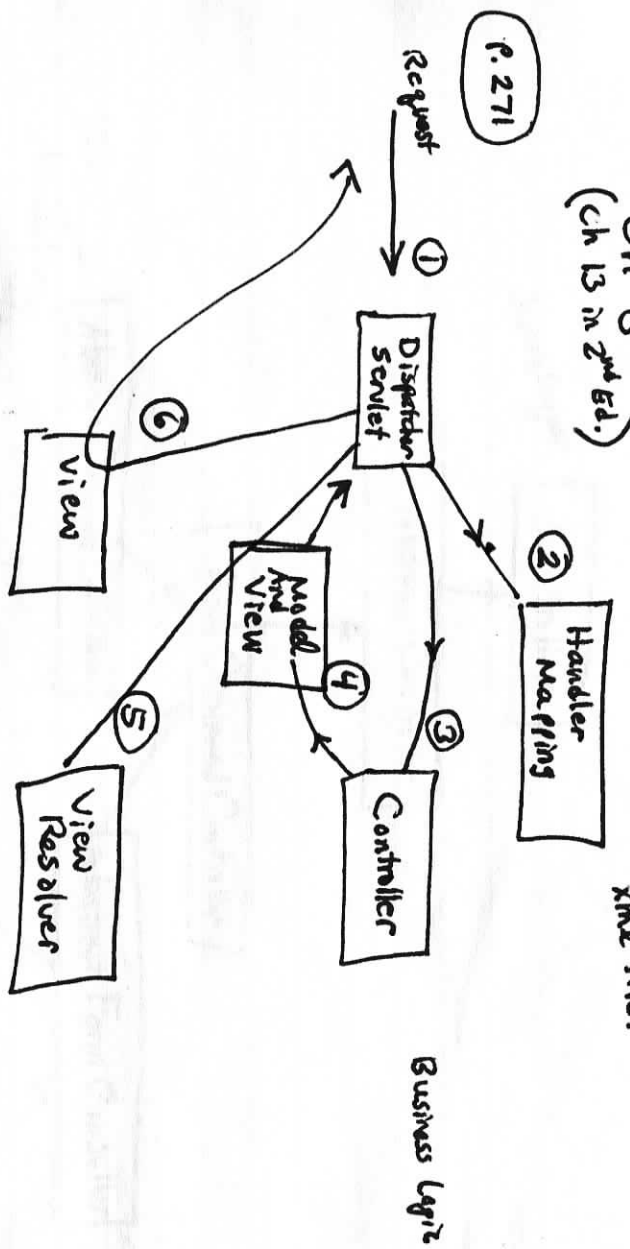

P. 271

When DispatcherServlet loads, by default it will try to load the spring application context from an xml file with same name as servlet ie. `servlet="training"` \Rightarrow `training-servlet.xml`
`rentaBikeApp` \Rightarrow `rentaBikeApp-servlet.xml` MVC

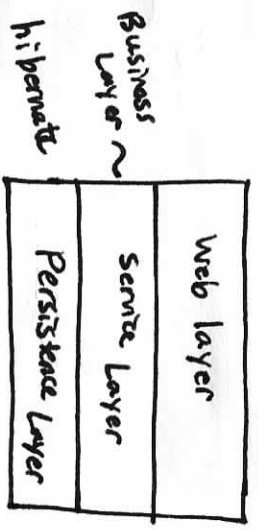

training-servlet.x Their recommendation
 - service.x
 - data.x

P. 275

return new ModelAndView("home", "message", greeting);

View Name; must be resolved to a .jsp (say), which renders the page.

Model Name (a variable's name) the literal string "message" is mapped to `getMessage()` in the jsp on p. 278

Model Object The value is obtained from the greeting bean p. 276

